SPH-DWF

CENTRIFUGAL HORIZONTAL MULTISTAGE PUMP

Centrifugal horizontal multistage, electric, single-body pump, in stainless steel, impellers and diffusers in stainless streel, operating water temperature 70° (air temperature 40°), low noise.
Available in single-phase and three-phase versions.

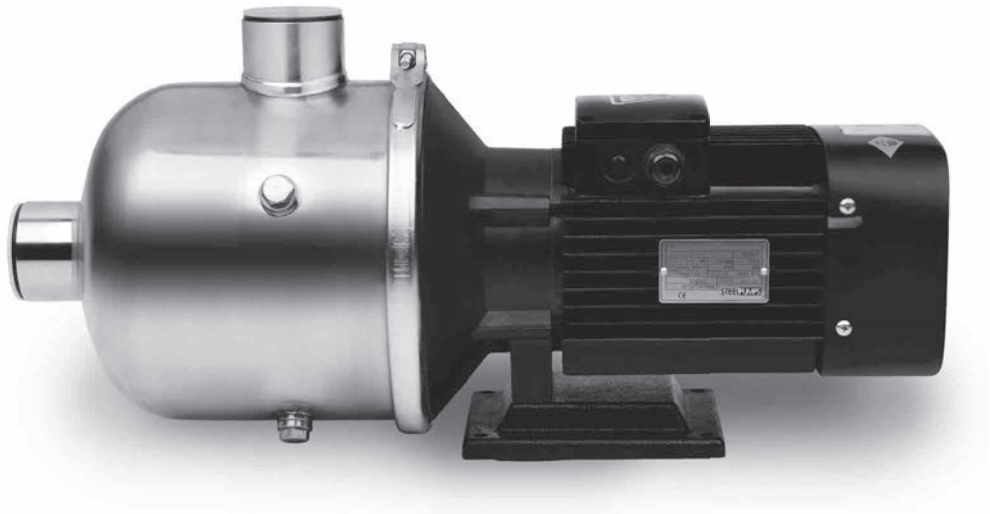

HYDRAULIC PERFORMANCE

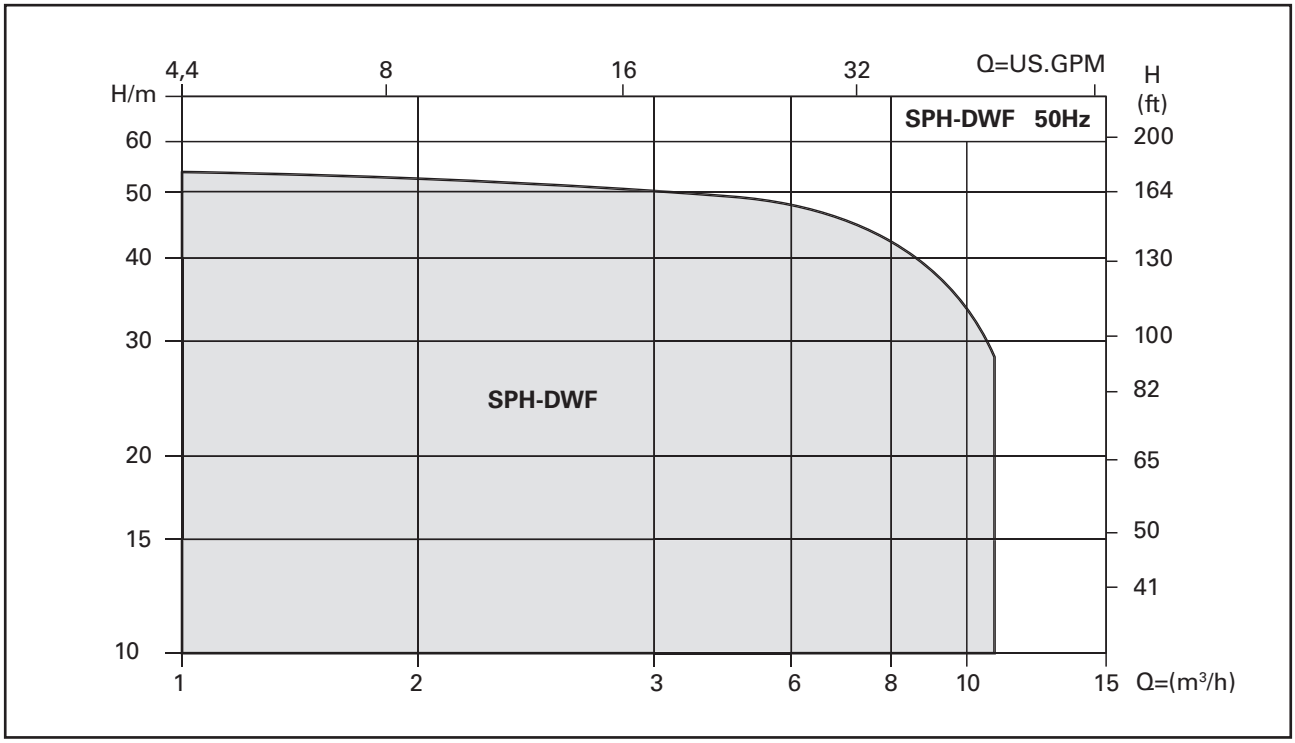

PUMP PERFORMANCE

Type	kW	HP	Q = (m³/h)	0,5	1,0	1,5	2,0	2,5	3,0	3,5
SPH-DWF 2-3	0,37	0,5	H (m)	28	27	24	21	20	17	14
SPH-DWF 2-4	0,55	0,8		36	34	32	28	26	23	17
SPH-DWF 2-5	0,55	0,8		46	43	40	35	33	28	22
SPH-DWF 2-6	0,75	1,0		54	50	48	42	38	33	25

Type	kW	HP	Q = (m³/h)	5	6	7	8	9	10	11
SPH-DWF 8-4	1,5	2,0	H (m)	39	38	36	34	30	26,5	22,5
SPH-DWF 8-4T	1,5	2,0		39	38	36	34	30	26,5	22,5
SPH-DWF 8-5T	2,2	3,0		49	47	45	42,5	38	33,5	28

Series 2

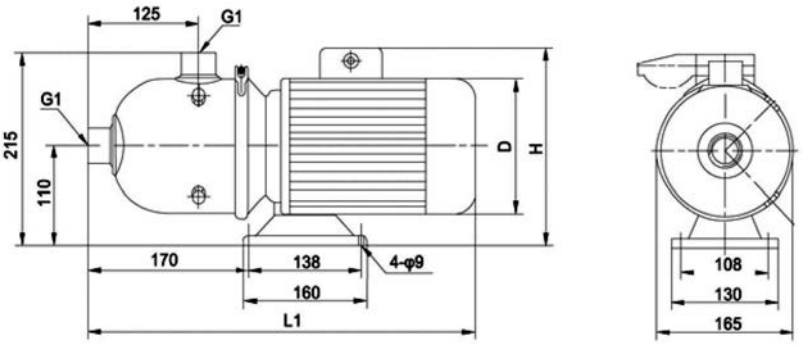

Series 8

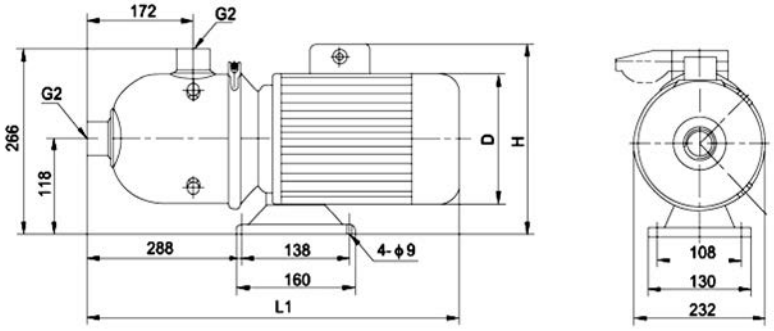

TABLE OF SIZES AND WEIGHTS

Type	Motor	Dimensions mm			Connections	Price Kg
		L1	D	H		
SPH-DWF 2-3	Three-Phase / Single-Phase	407	145	215/230	G1 - 1"	13
SPH-DWF 2-4		407	145	215/230	G1 - 1"	13
SPH-DWF 2-5		407	145	215/230	G1 - 1"	13
SPH-DWF 2-6		446	170	225/245	G1 - 1"	15
SPH-DWF 8-4		618	180	240/270	G2 - 1"¼	25
SPH-DWF 8-5		618	180	240/270	G2 - 1"¼	30