SPV-LQDL

CENTRIFUGAL VERTICAL MULTISTAGE PUMP

Centrifugal vertical electric pump, in stainless steel, inline inlet suction and outlet deliver, operating water temperature 70° (air temperature 40°), low noise. Available in single-phase and three-phase versions.

Serie 5

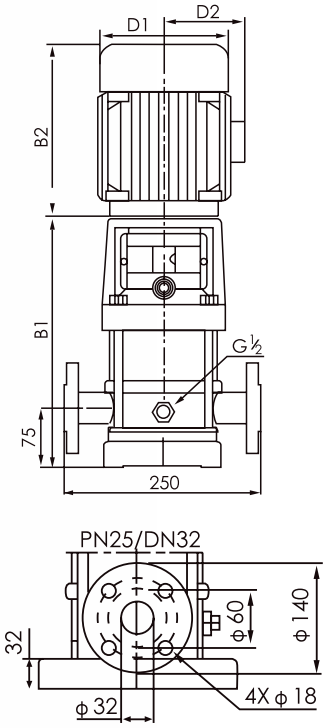

Serie 8-10

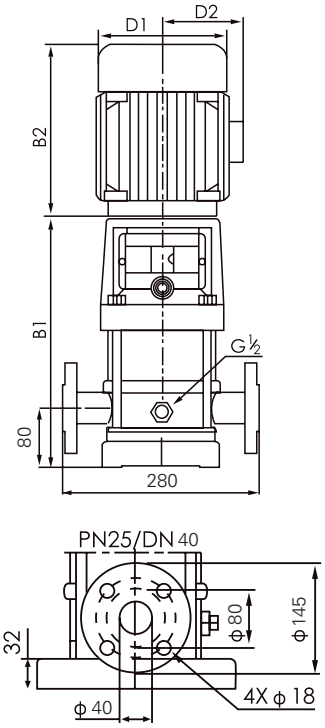

TABLE OF SIZES AND WEIGHTS

Type	Dimensions mm						Weight Kg
	B1	B2	B1+B2	D1	D2	D3	
SPV-LQDL 5-8	448	290	738	168	112	140	30
SPV-LQDL 5-9	475	290	765	168	112	140	36
SPV-LQDL 5-10	475	290	765	168	112	140	37
SPV-LQDL 5-12	556	290	846	168	112	140	39
SPV-LQDL 8-4	439	290	729	190	155	140	34
SPV-LQDL 8-5	469	290	759	190	155	140	44
SPV-LQDL 8-6	499	290	789	190	155	140	44
SPV-LQDL 10-5	469	290	759	190	155	140	47
SPV-LQDL 10-6	499	290	789	190	155	140	48
SPV-LQDL 10-7	539	325	894	197	165	160	54
SPV-LQDL 10-8	569	325	894	197	165	160	55

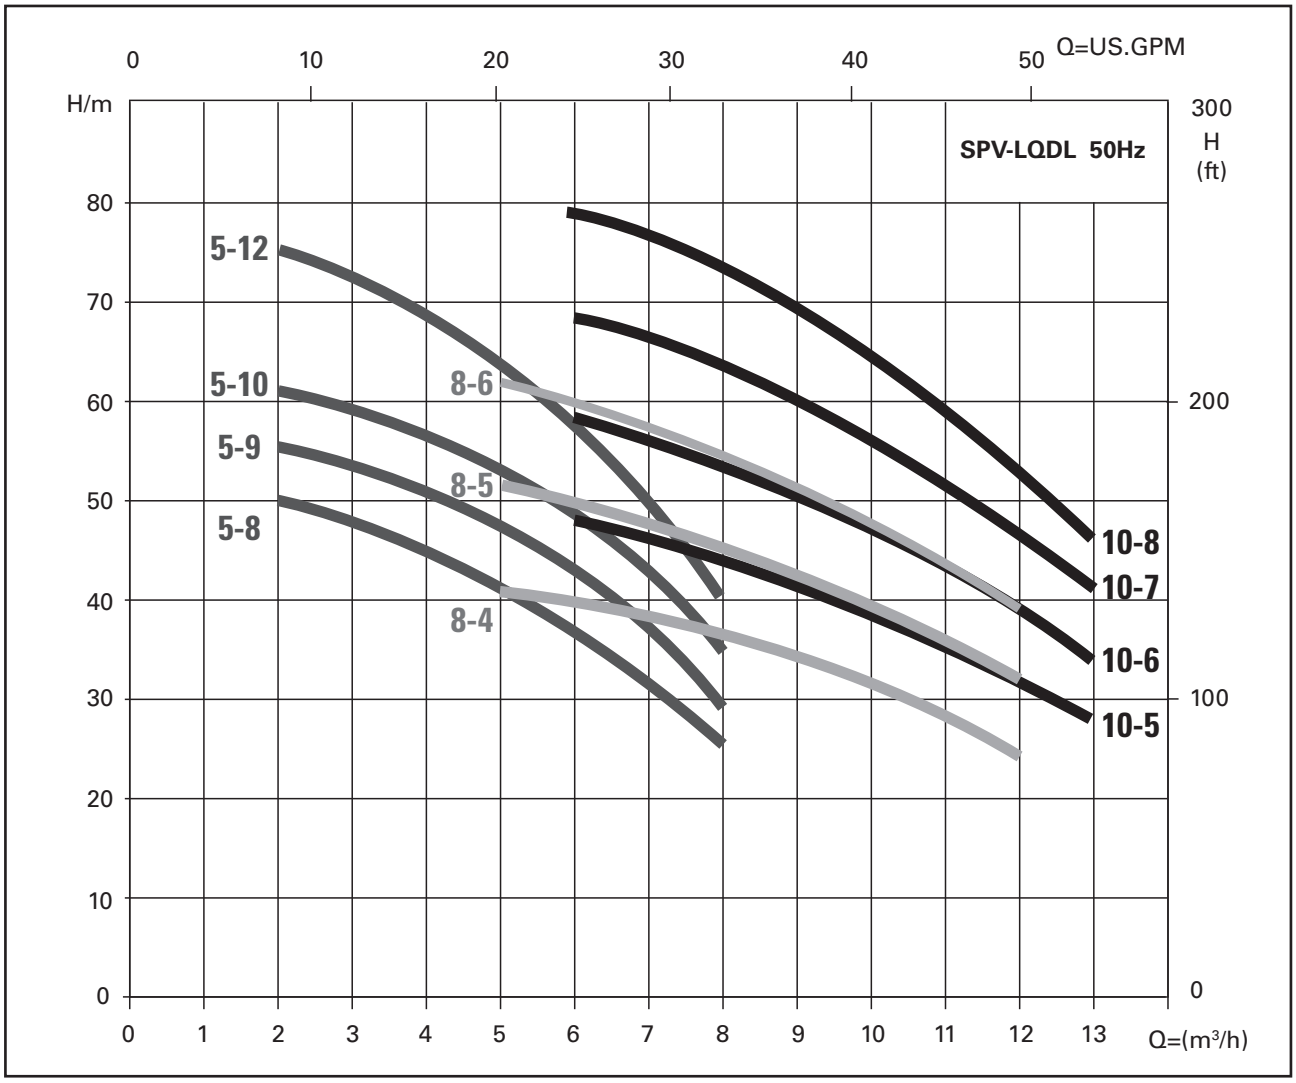

PUMP PERFORMANCE

Type	kW	HP	1 ~ Amp. 230V	3 ~ Amp. 380V	Q (m³/h)	2	3	4	5	6	7	8	9	10	11	12	13
SPV-LQDL 5-8	1,1	1,5	1,5	-		50	48	46	42	37	33	27	-	-	-	-	-
SPV-LQDL 5-9	1,5	2,0	2,0	-		56	54	51	48	43	37	30	-	-	-	-	-
SPV-LQDL 5-10	1,5	2,0	2,0	-		62	60	57	53	47	41	34	-	-	-	-	-
SPV-LQDL 8-4	1,5	2,0	-	-		-	-	-	41	39	38	36	34	32	28	26	-
SPV-LQDL 5-8T	1,1	1,5	-	2,65		50	48	45	42	37	33	27	-	-	-	-	-
SPV-LQDL 5-9T	1,5	2,0	-	3,4		56	54	51	48	43	37	30	-	-	-	-	-
SPV-LQDL 5-10T	1,5	2,0	-	3,4		62	60	57	53	47	41	34	-	-	-	-	-
SPV-LQDL 5-12T	2,2	3,0	-	4,75	H (m)	75	72	68	64	57	50	40	-	-	-	-	-
SPV-LQDL 8-4T	1,5	2,0	-	3,0		-	-	-	41	39	38	36	34	32	28	26	-
SPV-LQDL 8-5T	2,2	3,0	-	3,8		-	-	-	52	50	48	45	42	40	36	32	-
SPV-LQDL 8-6T	2,2	3,0	-	4,7		-	-	-	62	60	57	54	51	48	43	39	-
SPV-LQDL 10-5T	2,2	3,0	-	5,0		-	-	-	-	48	47	45	42	39	36	32	29
SPV-LQDL 10-6T	2,2	3,0	-	5,0		-	-	-	-	58	56	54	51	47	43	39	34
SPV-LQDL 10-7T	3,0	4,0	-	6,5		-	-	-	-	69	66	63	60	56	51	46	41
SPV-LQDL 10-8T	3,0	4,0	-	6,5		-	-	-	-	79	76	73	69	64	58	52	46